


PM-15S1G

REFERENCE INTEGRATED AMPLIFIER



Inspired by the already legendary SC-7/MA-9 combination and derived from the top class PM-11S1 we are proud to present the new Marantz PM-15S1. Coupling impressive design with outstanding performance we feel our engineers have created a worthy successor to the PM-17SA. The amplifier is built according to the new Marantz premium design without any visible screws, a heavy double layer chassis and a slightly blue illuminated front. The 3-stage construction with full Current Feedback and with short, symmetrical signal paths, independent left and right heatsinks, and new HDAM-SA2's ensure dynamic sound and perfect stereo imaging. Best components, reduction of external noise and other improvements further extend the quality. Derived from the PM-11S1 we are using the electronic linear volume control WM8816 from Wolfson. The PM-15S1 reflects our engineers' passion for pure music, designed with the true audiophile in mind.

- Marantz Champagne Finish
- 80 Watts/Ch Into 8 Ohms /120 Watts/Ch Into 4 Ohms
- Hybrid Ring-Core Power Transformer
- HDAM® SA2 Output Circuitry
- High Accuracy Liner Control Volume
- Current Feedback Topology Phono Amp
- WBT high quality speaker terminals
- Noiseless LCD Display
- F.C.B.S (Floating Control Bus System) Multi-linked Control
- Double Layered Bottom Plate

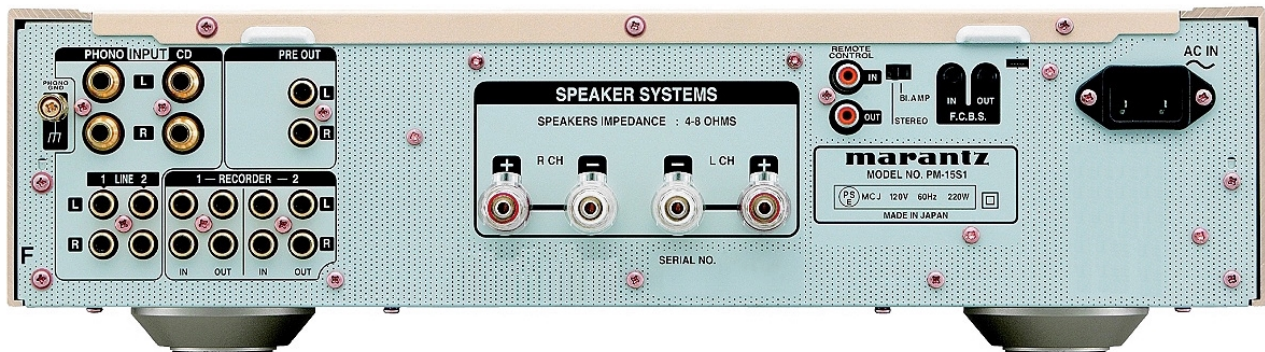

FEATURES

Number of Channels	2
Output Power/Channel (20Hz - 20kHz) @8Ω	80W
HDAM	• HDAM (SA2)
Power Transformer	Torroidal
Discreet Amplifier Stage	•
Individual Level Adjust	•
Tone Control	•
Phone Input	• MM/MC
Source Direct	•
Speaker A/B	-

IN/OUTPUTS

AUDIO	
Analog L&R In	0/5 (Balanced/Unbalanced)
Main Channel Amp In	-
Bridge Mono Mode	-
Analog L&R Out	2 (Rec Out), 1 (Pre Out)
Headphone Out	•
OTHERS	
D-Bus Remote (RC-5) In/Out	1/1
External Control (RS232C)	F.C.B.S. Floating Control Bus System
AC Outlets (Switched/Unswitched)	-/-

SPECIFICATIONS

THD (20Hz -20kHz, 8Ω)	0.05%
Input Sensitivity/Impedance	240mV/20kΩ (CD, Line)
Frequency Response	5Hz -100kHz CD, 1W 8Ω
S/N Ratio	90 dB (CD, Line)

GENERAL

Color	Gold
Front Panel	Aluminum
Remote Control (Aluminum Top System Remote)	RC-11S1PM
Power Requirements	AC 120V 60Hz
Power Consumption	230W (UL60065)
Dimensions W x H x D (Inches)	17 5/16 "x 4 15/16 "x 17 1/2 "
Weight (lbs.)	39.7

marantz®
LIFE AMPLIFIED™

*All specifications, dimensions and weights are subject to change without notice.

D&M Holdings, Marantz, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors in this spec sheet which may result in consequential errors being made by retail dealers, designers, custom installers, cabinet makers or end users, etc based upon information contained within this document.

© 09/08 Marantz America, Inc. • www.marantz.com