


# marantz®

## SR6011

### 9.2 CHANNEL NETWORK AV RECEIVER WITH BLUETOOTH AND WI-FI

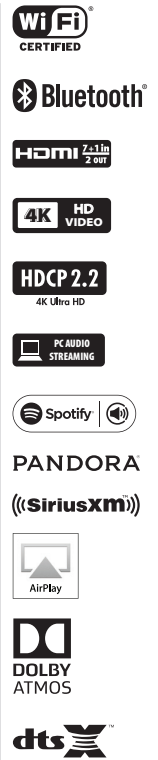

Immerse yourself in stunning 3D surround sound with the SR6011 AV receiver featuring Dolby Atmos and DTS:X. The SR6011 is equipped with 9 channel amplification, which means you can setup a 7.1.2 or 5.1.4 3D experience without the need of external amplifier. If you like to take advantage of the 11.2ch processing just add an 2ch power amplifier and enjoy Dolby Atmos or DTS:X up to a 7.1.4 configuration. If not in use for 3D audio the integrated amplifiers can get assigned to drive another pair of speakers in a second audio zone running a different source than the main room. Prepared for the future, the SR6011 features an advanced video section that's fully compatible with the latest HDMI 2.0a and HDCP 2.2 specifications on all 8 HDMI inputs.

#### Highlights

#### Your Benefits

• 9.2 channel AV Receiver with 110 W per channel (8 ohm, 20 Hz - 20 kHz, 0.08%, 2ch Drive)	• Enough power to fill big rooms with renowned Marantz sound
• Built-in WiFi with 2.4GHz/5GHz dual band support; built-in Bluetooth	• Improved network stability especially in WiFi-crowded homes
• 4K/60 Hz full-rate pass-through, 4:4:4 color resolution, HDR and BT.2020	• Latest HDMI standard for future-proof compatibility
• 8 HDMI inputs (incl. 1 front) with full HDCP 2.2 support; 2 HDMI outputs	• Extended connectivity: ready to feed a TV and projector in parallel
• Analogue to HDMI conversion and full SD/HD to 4K Upscaling	• HD video quality from existing DVDs or analogue sources
• Dolby Atmos (up to 7.1.4) and DTS:X (via firmware update)	• Immersive 3D sound with effects from overhead
• AirPlay, Bluetooth, Internet Radio, Spotify Connect, Pandora, SiriusXM, Network Audio Streaming	• Access to almost unlimited online music sources
• DSD (2.8/5.6MHz), FLAC, ALAC, AIFF and WAV support	• High Resolution audio streaming, even gapless
• Audyssey MultEQ XT32, LFC, Sub EQ HT, Dynamic Volume and Dynamic EQ	• Delivering the ultimate equalization for your individual room
• Color-coded speaker terminals, Setup Assistant, Marantz 2016 AVR Remote App	• Hassle-free installation, setup and operation
• Intelligent ECO mode with off/on/auto setting	• Energy-conscious without compromising on performance
• Advanced Multi-Room options; 11.2ch pre-out with 11.2ch processing; RS232 Control; Crestron Connected	• Audio and video in multiple rooms; ready for 3rd Party Home Automation systems

us.marantz.com

ca.marantz.com



# because music matters

## SR6011 9.2 CHANNEL NETWORK AV RECEIVER WITH BLUETOOTH AND WI-FI



Design and specifications are subject to change by Marantz without notice.

FEATURES	SR6011
<b>MULTICHANNEL SURROUND</b>	
DTS HD Master / DTS:X / DTS Neural:X	• / • / •
Dolby TrueHD / Dolby Atmos / Dolby Surround	• / • / •
Multichannel Stereo	•
Compressed audio Enhancer: MDAx2	•
<b>NETWORK / SOURCES</b>	
Network Audio Streaming	•
Lossy formats MP3 / WMA / AAC	• / • / •
Lossless formats FLAC / ALAC / WAV	• / • / •
DSD Streaming	• (2.8 MHz / 5.6 MHz)
FLAC HD 192/24 / WAV 192/24 / ALAC 96/24	• / • / •
Gapless playback	• (FLAC, WAV, ALAC, DSD)
AirPlay audio streaming	•
Internet Radio (vTuner)	•
Spotify Connect *	•
Compatible with Remote APP	Android/iOS/Kindle
Ethernet / Wi-Fi	• / • (dual antenna / 2.4/5 GHz)
Network: (IP-control / update)	• / •
Front Inputs: HDMI / USB	• / •
USB Audio / Made for iPod / Made for iPhone	• / • / •
FM / AM Tuner	• / •
Bluetooth	•
<b>HDMI</b>	
4K 60Hz 4:4:4 resolution / HDCP 2.2	• / •
HDMI pass through on stand-by	•
3D video pass through	•
Video conversion	CVBS / HDMI; Comp / HDMI
Video processing and -scaling	1080p, 4K 60/50Hz
<b>INPUTS/OUTPUTS</b>	
<b>VIDEO</b>	
Composite In / Out	3+1/1
Component In / Out	2/1
HDMI In / Out	7+1/2

<b>AUDIO</b>	
Analogue In / Out	5+1/0
Digital Optical In	2
Digital Coaxial In	2
Multichannel Pre Out	• (11.2 with 11.2 processing)
Zone audio preout	•
Subwoofer Out	2
7.1 Multichannel input	•
<b>SPECIFICATIONS</b>	
Number of poweramps	9
Power Output per channel	
Maximum Power Output Per Channel	220 W
6 ohm, 1 kHz, 0.7%, 2ch Drive	150 W
8 ohm, 20 Hz - 20 kHz, 0.08%, 2ch Drive	110 W
Audio Signal to Noise Ratio	102 dB
<b>GENERAL</b>	
Available colours: Black	•
System Remote Control	RC025SR
Power Consumption in W	680
Power Consumption No-Sound (ECO ...on/off) in W	50 / 80
Standby Consumption in W	0.2 (with CEC 0.5)
Maximum Dimensions (W x D x H) in mm	17.3 x 15.7 x 6.3
Weight in LBS	28
<b>EAN</b>	
NA SR6011/U1B	699927150259
	Black

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by DGM Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dol-by Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: [www.spotify.com/connect/third-party-licenses](http://www.spotify.com/connect/third-party-licenses). Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of DGM Holdings, Inc.

\* This feature is not available in all countries.

\* All specs can be subject to change.